
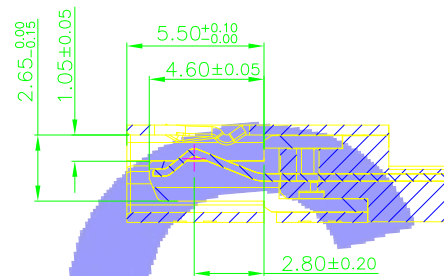



RoHS PASS

CUSTOMER DRAWING

REV	ECN NO	LOCATIONS	DESCRIPTION	DATE	DESIGN
A0			NEW RELEASED	01/14'15	Frank Zhu

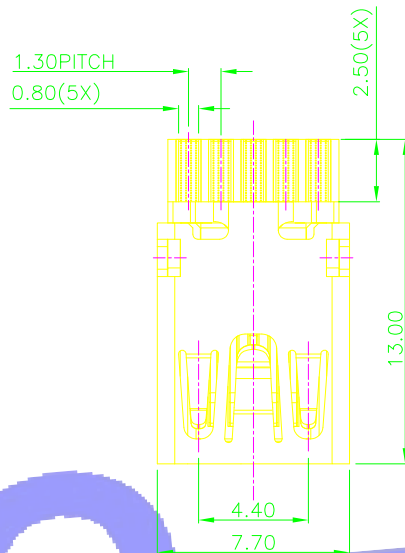

SECTION A-A

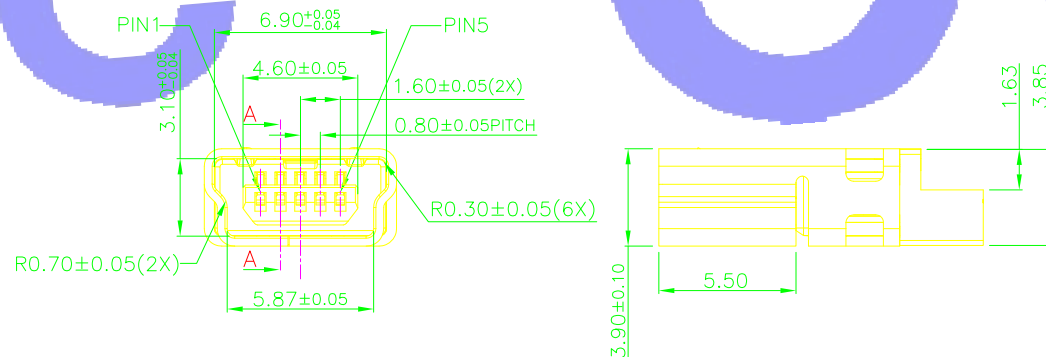

ELECTRICAL CHARACTERISTICS

Contact Current Rating: 1 Amperes.
Dielectric Withstanding Voltage: AC 100 V r.m.s.
Insulation Resistance: 100 Megohms Minimum
at DC 500V.
Contact Resistance: 50 Milliohms Maximum.
Operating Temperature: -55°C~85°C.

MATERIALS:

Contacts: Copper Alloy.
Insulator: LCP+Glass Fiber, UL 94V-0 Rated.
Shell: Copper Alloy

MUBX-5BFX-XXS3-01

5-ROHS

CONTACT FINISH:

- 1-GOLD FLASH
- 3-SELECTIVE GOLD 5u"
- 4-SELECTIVE GOLD 10u"
- 5-SELECTINE GOLD 15u"
- 7-SELECTIVE GOLD 30u"

SHELL FINISH:

- N-NI
- G-AU
- T-TIN(LIGHT)
- D-TIN(MIST)

INSULATOR COLOR:

- W-WHITE
- K-BLACK

e-Com[®] 苏州正耀电子有限公司
ELECTORNIC(SU-ZHOU) CO., LTD

DRAW NO:	DATE	MATERIAL: SEE NOTE 1	DRAW NAME:
DESIGN:		FINISH: /	MINI USB CABLE TYPE
CHECK:		FILE: /	MODEL:
REVIEW:		P/N NO: MUBX-5BFX-XXS3-01	UNIT: mm
APPROVED:		REV: A0 SCALE: N/A	SHEET 1/1

DIM	TOL	DEC	TOL
X.	±1.0	X.*	±2'
X.X	±0.30	X.X*	±1'
X.XX	±0.20	X.XX*	
X.XXX	±0.10	X.XXX*	